

X LINE version







CS 100/50 TANDEM PRIME X3 10 BAR








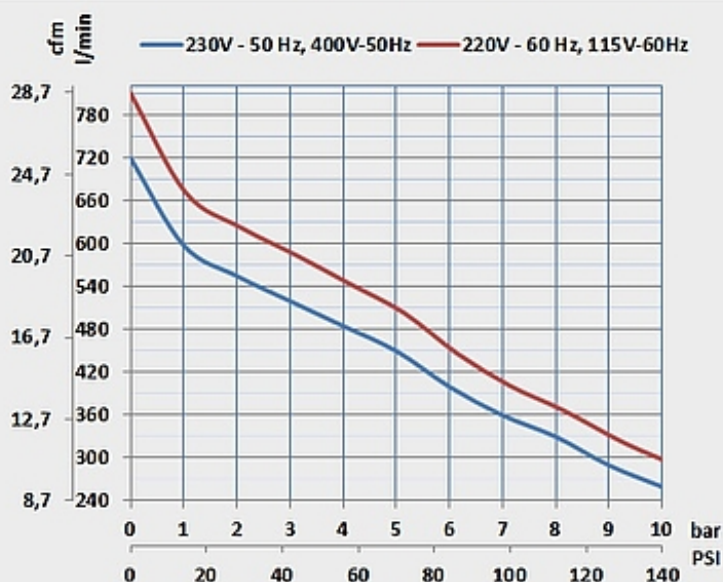
Code: PR-CS600-090-SMT3

Description: Silenced oil free compressor, 6 cylinders, FAD at 8 bar 316 l/min, tank capacity 100 l, with membrane air dryer able to warrantee -20°C dew point.

- 115V-60Hz and 220V-60Hz versions available on demand
- compressor suitable for heavy duty cycles
- compact design and equipped of wheels for easy moving
- forced cooling system
- double compressor protection: thermal protection and adsorption protection

Model	 Air dryer	 Air Capacity	 FAD @ 8bar	 Motor	 Volt. Freq.	 Receiver
		m3/h l/min cfm	m3/h l/min cfm	HP KW	V Hz	l GAL
CS 100/50 TANDEM PRIME X3 10 B	yes	- 720 25,2	- 316 11,2	3+3 2,2+2,2	230-400 50	90 23,77

Model	 Noise Level	 Duty cycle	 Max pressure	 Size	 Net weight
	dB(A)		bar PSI	mm	Kg lb
CS 100/50 TANDEM PRIME X3 10 B	56	70%	10 145	1245x725x1020	221 487



The manufacturer reserves the right to modify the data shown